

LP-C6MJ0BLFT LanPro Reliable® Unshielded CAT 6 U/UTP Network Cable, LSZH-rated with Solid 100% Copper Conductors AWG 24 and Flexible-X™ Nylon core for symmetry in 5000 ft (1.5km) Wood spool, with RJ45 connector at the end.

LPC6MJ0BLFT_SS_ENB01W

Features

- Ultra Flexible.
- Superior performance to traditional designs.
- 568-A and 568-B compatible.
- Exceeds ANSI/TIA-568.2-D, ISO/IEC 11801. Vertical-Tray, CSA FT1 requirements.
- Rugged Construction. RipCord included.
- Backward compatible with CAT 5e and CAT 5 systems.
- Excellent price/performance ratio.
- Four (4) AWG 24 Twisted Pairs.
- Flame rating: LSZH thermoplastic cover Jacket with a thickness of 0.55 mm.
- Packaged in one convenient presentation: 5000 feet (1.5km) Wood spool.
- The Geometry is better with Flexible-X™ technology.
- Operating voltage: <48 Vrms.
- No polytetrafluoroethylene (PTFE) also known as Teflon neither Silicon jackets are used on this family of cables.

Applications

- Unshielded LanPro Reliable® CAT 6 U/UTP Network LSZH-rated is intended for Gigabit Ethernet, 100BASE-Tx, token-ring, 155 Mbps ATM, 100 Mbps TP-PMD, ISDN, analog (Broadband, Baseband), digital video and Voice over IP (VoIP), it can also be used for Video surveillance IP cameras.
- The scope of applications of these cables are data centers and data communication.
- The cross section on this cables is 0.20mm².



LP-C6MJ0BLFT LanPro Reliable® Unshielded CAT 6 U/UTP Network Cable, LSZH-rated with Solid 100% Copper Conductors AWG 24 and Flexible-X™ Nylon core for symmetry in 5000 ft (1.5km) Wood spool, with RJ45 connector at the end.

The LP-C6MJ0BLFT LanPro Reliable® Unshielded CAT 6 U/UTP Network Cable, LSZH-rated with Solid 100% Copper Conductors AWG 24 with Flexible-X™ Nylon core for symmetry in 5000 ft (1.5km) Wood spool is the answer given by LanPro to the large demand imposed by today's high performance applications at reasonable prices.

Tested to well over 250 MHz, the guaranteed performance of this cable meets the ANSI/TIA-568.2-D, ISO/IEC 11801, CSA FT1 requirements, making it ideal for transmission links supporting today's networking protocols.

The unshielded LanPro Reliable® CAT 6 U/UTP Network Cable is available for immediate delivery in blue and gray color, other colors available under request.

Now with "Flexible-X™" construction, Reliable® CAT 6 cable isolates and arranges the pairs throughout the length of the cable, improving field installation as well as performance.

A Technical Specifications

Conductor	Material	Copper 100%		
	AWG #	24		
	Nominal Diameter (mm)	0.50	Positive tolerance	+0.005
			Negative tolerance	-0.005
Insulation	Material	HDPE (High Density Polyethylene)		
	Diameter (mm)	0.88±0.05		
	Color	A - Blue, White-Blue B - Orange, White-Orange C - Green, White-Green D - Brown, White-Brown		
Ripcord	Yes			
Separator	Flexible-X™			
Drain wire	None			
Jacket	Thickness	0.55±0.05 mm		
	External diameter (O.D.)	5.5±0.4 mm		
	Surface finish	Clean, FRAP, Satination		
	Material	LSZH Rated, complies RoHS		
	Color	Blue and Gray, other colors under request		
Markings	Type height	3.0±0.3 mm		
	Color	Black		
	Print error & space	≤ ±0.5%, 1m		
Packaging	Wooden Tray & Carton			
	Product length	1.5km ± 1.5 m		
	Carton Dimensions	According to the requires		
Physical properties	Temperature Range	-20°C to 75°C		
Mechanical characteristics	Tensile strength before Aging (Mpa)	≥13.5		
	Elongation before aging (%)	≥150		
	Aging Period (°C x hours)	100°C x 24 h x 7d		
	Tensile strength after Aging (Mpa)	≥12.5		
	Elongation after aging (%)	≥125		
	Cold Bend (-20±2°Cx4h)	No visible cracks		
	Bending Radius	8x external Dia. during install		
Electrical Properties (20°C)	Impedance (1.0 – 250.0 MHz)	100 ±15 Ohm		
	Delay skew @20°C (1.0 – 250.0 MHz)	≤ 45 ns/100m		
	Maximum DC Resistance @ (20°C)	9.5 Ohm/100 m		
	% Resistance unbalance between conductors (Max)	5 %		

B Certification



Cable ID: LANPRO-CAT6 24AWGG

Date / Time: 08/13/2018 02:18:29 PM
 Headroom 3.7 dB (NEXT 12-36)
 Test Limit: TIA Cat 6 Perm. Link
 Cable Type: Cat 6 U/UTP
 Calibration Date: 06/28/2018

Operator: LANPRO NETWORKS
 Software Version: 2.7800
 Limits Version: 1.9500
 NVP: 69.0%

Test Summary: PASS

Model: DTX-1800
 Main S/N: 9514069
 Remote S/N: 9514070
 Main Adapter: DTX-PLA002
 Remote Adapter: DTX-PLA002

Length (ft), Limit 295	[Pair 45]	274
Prop. Delay (ns), Limit 498	[Pair 12]	420
Delay Skew (ns), Limit 44	[Pair 12]	17
Resistance (ohms)	[Pair 12]	15.3
Insertion Loss Margin (dB)	[Pair 12]	2.5
Frequency (MHz)	[Pair 12]	249.5
Limit (dB)	[Pair 12]	31.1

Worst Case Margin Worst Case Value


PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	36-78	12-36	36-78
NEXT (dB)	3.7	4.8	3.7	4.8
Freq. (MHz)	240.5	230.5	240.5	230.5
Limit (dB)	35.6	35.9	35.6	35.9
Worst Pair	36	45	36	36
PS NEXT (dB)	3.4	5.5	3.4	6.6
Freq. (MHz)	240.0	61.3	240.0	230.5
Limit (dB)	33.0	42.8	33.0	33.3

PASS	MAIN	SR	MAIN	SR
Worst Pair	45-36	45-36	45-36	45-36
ACR-F (dB)	5.9	6.2	5.9	6.2
Freq. (MHz)	235.0	249.0	235.0	249.0
Limit (dB)	16.8	16.3	16.8	16.3
Worst Pair	78	36	78	36
PS ACR-F (dB)	8.1	7.8	8.2	7.8
Freq. (MHz)	219.5	249.0	248.0	249.0
Limit (dB)	14.4	13.3	13.3	13.3

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-45	12-36	36-78
ACR-N (dB)	5.5	6.0	6.8	7.8
Freq. (MHz)	18.4	16.9	243.5	230.5
Limit (dB)	46.1	47.0	4.9	6.2
Worst Pair	36	45	36	36
PS ACR-N (dB)	5.7	6.7	7.0	9.6
Freq. (MHz)	17.3	61.3	243.5	230.5
Limit (dB)	44.4	28.6	2.3	3.6

PASS	MAIN	SR	MAIN	SR
Worst Pair	45	45	45	45
RL (dB)	2.5	2.6	6.3	2.6
Freq. (MHz)	17.0	42.8	173.0	42.8
Limit (dB)	19.8	17.7	11.6	17.7

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T ATM-25 ATM-S1
 ATM-155 100VG-AnyLan TR-4
 TR-16 Active TR-16 Passive

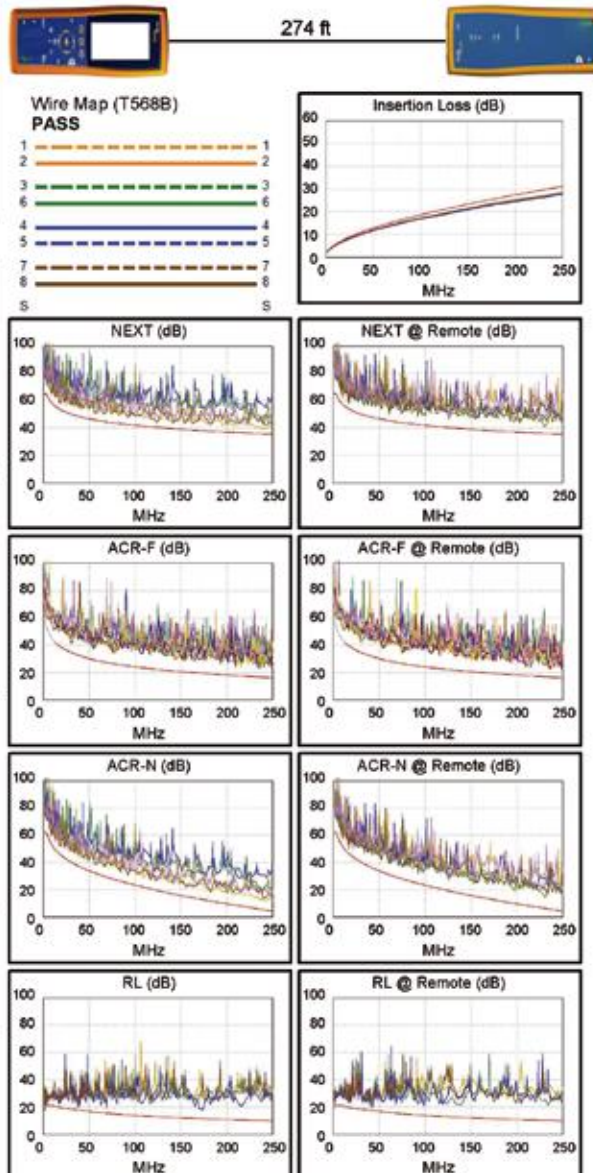

LinkWare™ PC Version 9.3


Project: LANPRO TESTING
 Untitled1

Site: LANPRO LABS



C Certification Characteristics

Freq.(MHz)	RL > dB	ATT ≤dB	NEXT ≥dB	Retraso ≤ns	PSNEXT > dB	ELFEXT > dB	PSELFEXT ≥ dB
1	19.1	3.0	65.0	570.0	62.0	64.2	61.2
4	21.0	3.5	64.1	552.0	61.8	52.1	49.1
8	21.0	5.0	59.4	546.7	57.0	46.1	43.1
10	21.0	5.5	57.8	545.4	55.5	44.2	41.2
16	20.0	7.0	54.6	543.0	52.2	40.1	37.1
20	19.5	7.9	53.1	542.1	50.7	38.2	35.2
25	19.0	8.9	51.5	541.2	49.1	36.2	33.2
31.25	18.5	10.0	50.0	540.4	47.5	34.3	31.3
62.5	16.0	14.4	45.1	538.6	42.7	28.3	25.3
100	14.0	18.6	41.8	537.6	39.3	24.2	21.2
200	11.0	27.4	36.9	536.5	34.3	18.2	15.2
250	10.0	31.1	35.3	536.3	32.7	16.2	13.2

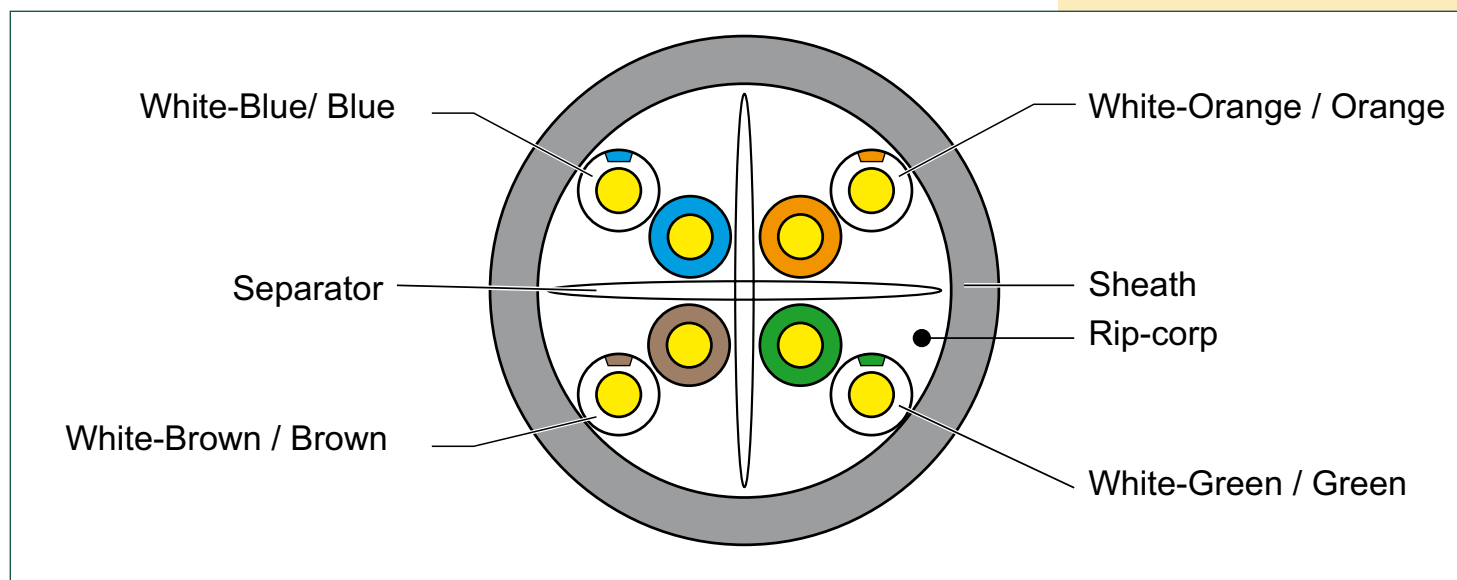D Structure

E How to order

LP-C6MJ0BLFT LanPro Reliable® Unshielded CAT 6 U/UTP Network Cable, LSZH-rated with Solid 100% Copper Conductors AWG 24 and Flexible-X™ Nylon core for symmetry and blue jacket in 5000 ft (1.5km) Wood spool, with RJ45 connector at the end.